


Data Sheet | Item Number: 2687-2344

Power supply unit; Eco 2; 3-phase; 24 VDC output voltage; 5 A output current; DC OK contact

<https://www.wago.com/2687-2344>



Similar to illustration

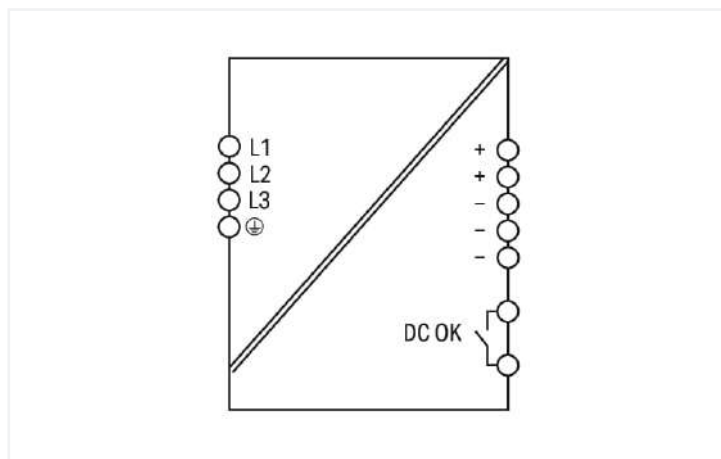

Similar to illustration

Features:

- Signal output, optical status indication
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Connection technology with push-in termination and tool-free lever operation
- Electrically isolated output voltage (SELV/PELV) per EN 61010/UL 61010
- Marker slot (Item No. 2789-1233, not included) for WAGO's marking cards (WMB) and WAGO's marking strips

Technical data

Input	
Phases	3
Nominal input voltage $U_{i, nom}$	3 x AC 400 ... 500 V
Input voltage range	3 x AC 340 ... 550 V
Nominal mains frequency range	47 ... 63 Hz
Inrush current	≤ 20 A (after 1 ms)
Power factor	≥ 0.5 (400 VAC; nominal load)

Output	
Nominal output voltage $U_{o, nom}$	DC 24 V (SELV/PELV)
Output voltage range	DC 24 ... 26.4 V
Nominal output current $I_{o, nom}$	5 A
Nominal output power	120 W
Deviation	≤ 1 %
Residual ripple	≤ 100 mV (peak-to-peak)
Overload behavior	Constant current up to 125 %; shutdown and automatic restart in the event of a short circuit

Signaling and communication

Signaling	Optical status indication (overload) Optical status indication (DC OK) Digital signal output (DO)
-----------	---

Efficiency/power losses

Power loss P_I	≤ 3 W (400 VAC; no load)
Efficiency (typ.)	88 %

Safety and protection

Protection class	I
Transient suppression (primary)	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
MTBF	> 600,000 h (at 25 °C)

Connection data

Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 2604 Series
Solid conductor	0.2 ... 0.4 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 0.4 mm ² / 24 ... 12 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm ²
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm ²
Strip length	9 ... 11 mm / 0.35 ... 0.43 inches

Physical data

Width	49.5 mm / 1.95 inches
Height	130 mm / 5.118 inches
Depth from upper-edge of DIN-rail	130 mm / 5.118 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0 MJ
Weight	800 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	$\leq -3\%/K$ at $T_U \geq +50^\circ C$
Climatic category	3K3 (per EN 60721)
Operating altitude (max.)	2000 m



Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-2 UL 61010-1 UL 61010-2-201

Commercial data

PU (SPU)	1 pcs
Country of origin	CN
GTIN	4066966433258
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------